



T1-11 PRIME



- ✓ IDEAL FOR DECORATIVE USE
- ✓ 100% PINE
- ✓ FSC® CERTIFIED PRODUCT



CarliPlywood 





T1-11 PRIME



USAGE ADVANTAGES

- ✓ High mechanical strength
- ✓ Distinctive aesthetics with decorative grooves
- ✓ Good dimensional stability
- ✓ Sustainable product made from reforested wood
- ✓ Moisture resistant (phenolic glue)
- ✓ Calibrated material

AVAILABLE PROFILES

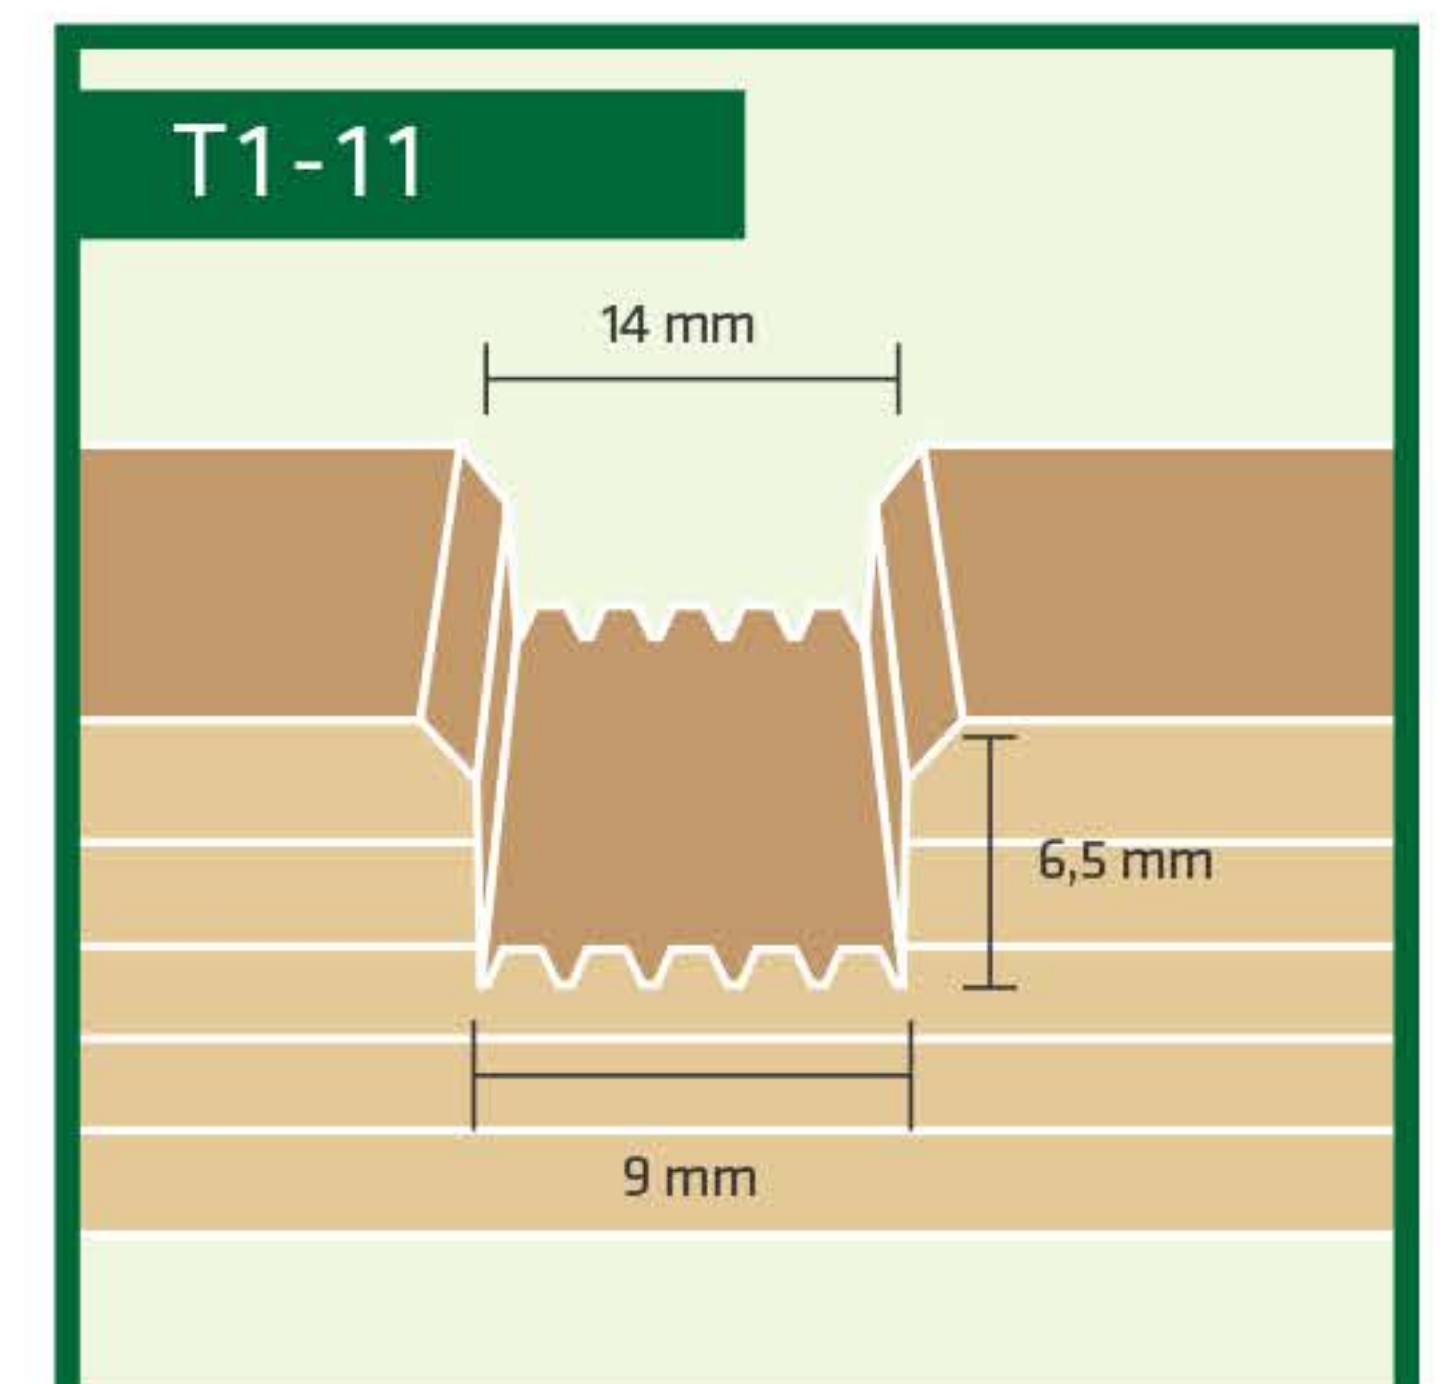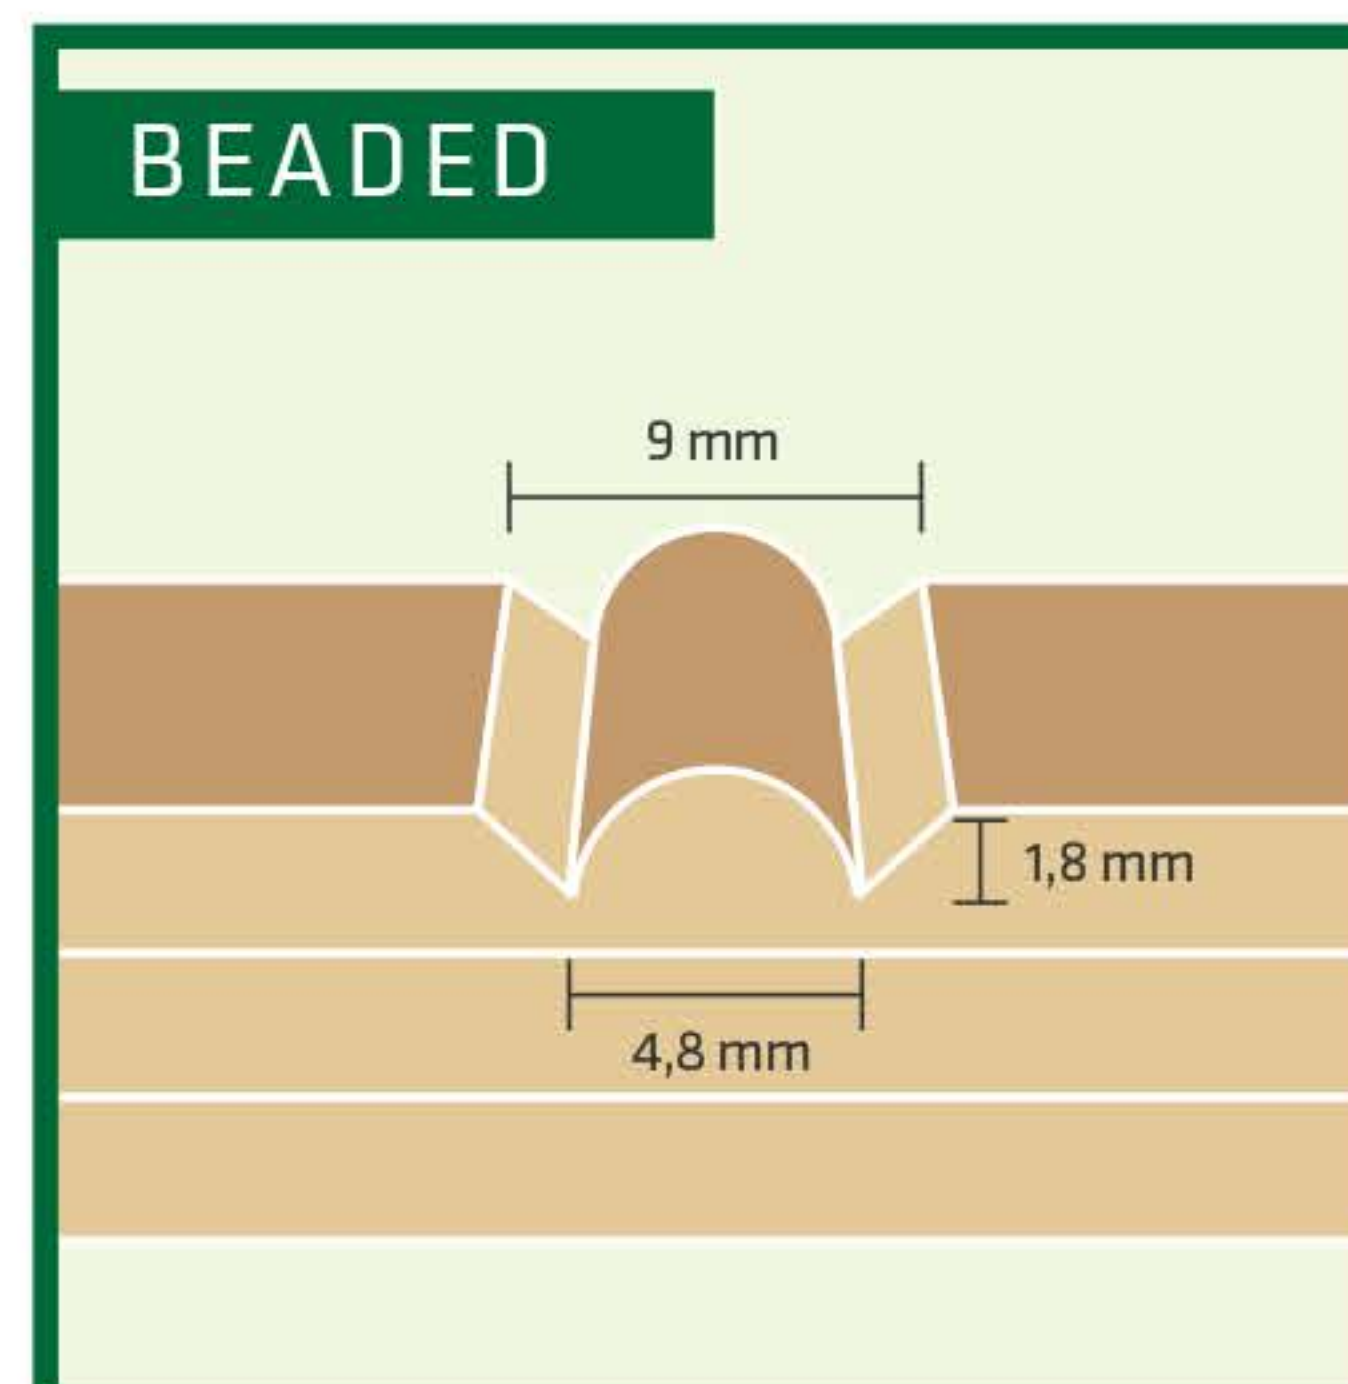

CHARACTERISTICS

	C+	C	B SOLID FACE
Solid Face	✓	✗	✓
Live Knots	✓	✓	✗
Dead Knots	ALL KNOTS REPAIRED	✓	✗
Filler Patches	✗	✗	✗
Wood Repairs		✗	✗
Calibration	✓	✗	✓

GENERAL SPECIFICATIONS

DIMENSIONS 4'x8' 1220mmx2440mm	THICKNESS (mm)	9	12	15
	Number of layers	3	3/5	5
DENSITY	480 - 550 kg/m ³			
GLUE	WBP Phenolic Resin			
GRIT	180-220			
CALIBRATION	Tolerance ±0.2mm and Sandpaper Grit 80-120			
MOISTURE	8% to 12% for all boards			
FOREST CERTIFICATION	FSC® certified product			



Carli Plywood

Elevate your projects with T1-11 Prime.
Contact us for more information.

 **+55 42 3624.5400**

 **+55 42 99981.0089**

 **carliplac.com.br**

 **carliplac@carliplac.ind.br**